



Mag-03[®]

Three-Axis Magnetic Field Sensors

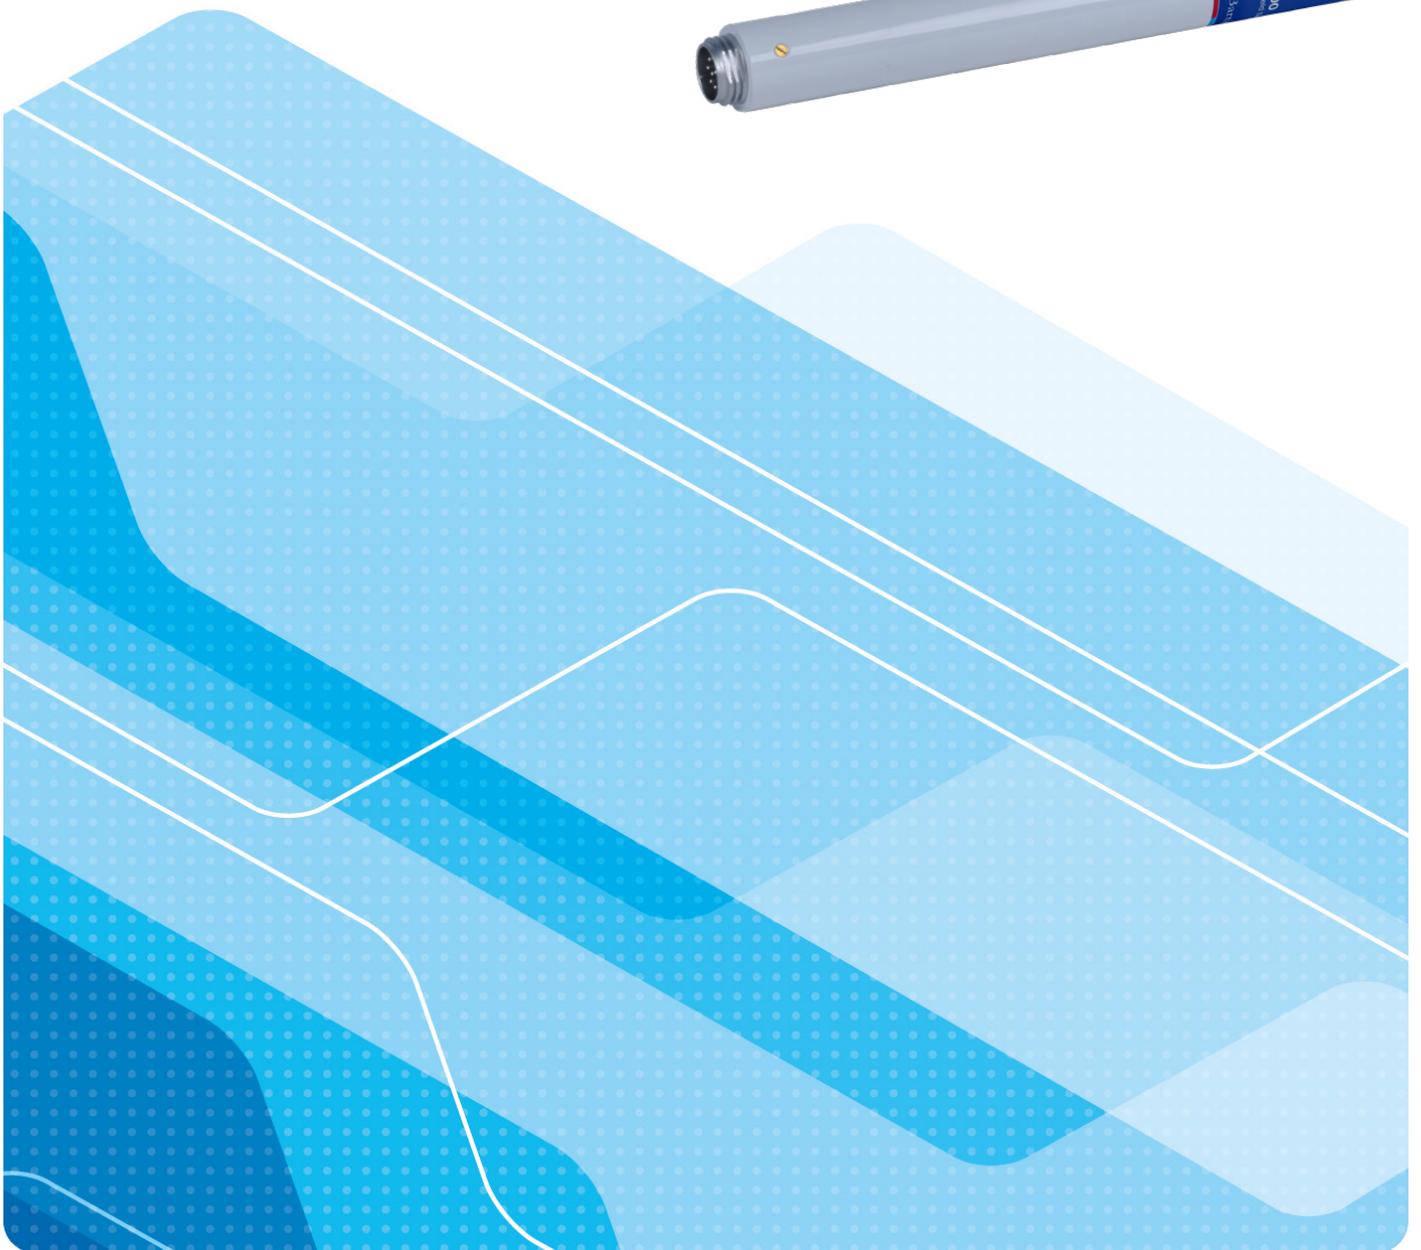

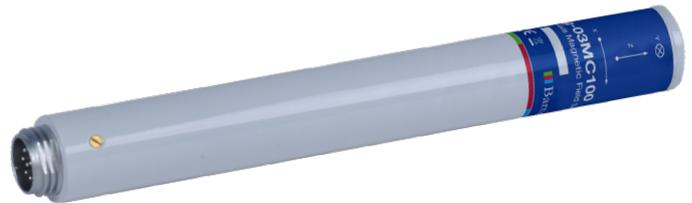

Mag-03[®] Three-Axis Magnetic Field Sensors

These compact, high performance fluxgate sensors with integral electronics provide precision measurements of static and alternating magnetic fields in three axes. They are available in a variety of enclosures. Powered from any $\pm 12V$ supply, outputs are in the form of three analogue voltages from 0 to $\pm 10V$, proportional to B_x , B_y and B_z .

The sensors have a very wide range of applications in physics, bioelectromagnetics, geophysical exploration, and defence.

A range of power supply and data acquisition units are available.



Bartington is a registered trade mark of Bartington Holdings Limited in the following territories: Argentina, Australia, Brazil, Canada, Chile, China, European Union, Hong Kong, Iceland, India, Israel, Japan, Malaysia, Mexico, New Zealand, Norway, Russia, Singapore, South Africa, Switzerland, Taiwan, Turkey, United Kingdom, United States of America, and Vietnam.

Bartington is used under licence by Bartington Instruments Limited.

Mag-03 is a registered trade mark of Bartington Holdings Limited in the following territories: China and United Kingdom.

Mag-03 is used under licence by Bartington Instruments Limited.

Features

- Cylindrical, square section, unpackaged and two-part
- Noise levels down to $<6\text{pTrms}/\sqrt{\text{Hz}}$ at 1Hz
- Measuring ranges from $\pm 70\mu\text{T}$ to $\pm 1000\mu\text{T}$
- Bandwidth to 3kHz

Typical Applications

- Magnetic field monitoring
- Use as feedback sensors in active magnetic field shielding systems
- Site surveys prior to MRI or Electron Microscope installation
- Electromagnetic surveys
- Aeromagnetic surveys
- Magnetic signature ranges



Product Identification

Product name	Package	Noise specification	Range in μT
Mag-03	MC = Cylindrical	Standard = no letter	± 70
	MCES = Cylindrical, environmentally sealed		± 100
	MCFL = Cylindrical, connections via flying leads		± 250
	MCUP = Cylindrical, unpackaged		± 500
	MCT = Cylindrical with titanium enclosure		± 1000
	MCTP = Cylindrical, two-part construction		
	MS-NC = Square section no connector		
	MSES = Square section, environmentally sealed		
	MSSFL = Submersible square section with tail flying lead		
	IE = Independent elements		
	IEv1 = Independent elements, alternative connector		
	IEHV = Independent elements, for use in a high vacuum chamber		

Example: Mag-03MC100 is a standard noise sensor with a range of $\pm 100\mu\text{T}$.

Note: For some Mag-03 magnetometers (Mag-03 MCFL, MCTP, MCUP, IE), lead lengths must be specified and this length is included in the product identification. For example, Mag-03MCFL250-1000 is a Mag-03MCFL with a range of $250\mu\text{T}$ and flying leads of 1000mm.



Specifications

Performance					
Number of axes	Three				
Polarity	+ve non-inverting output when pointing North				
Full Scale Measuring Ranges	$\pm 70\mu\text{T}$	$\pm 100\mu\text{T}$	$\pm 250\mu\text{T}$	$\pm 500\mu\text{T}$	$\pm 1000\mu\text{T}$
Scaling error	$<\pm 0.5\%$				
Linearity error	$<0.0015\%$ (least squares fit)				
Frequency response	0 to 1kHz maximally flat, $\pm 5\%$ maximum at 1kHz				
Max Bandwidth at 50 μT peak	$>3\text{kHz}$				
Max Bandwidth at full scale	$>3\text{kHz}$	$>3\text{kHz}$	1800Hz	700Hz	400Hz
Measurement noise floor: standard version low noise version ($\pm 70\mu\text{T}$ and $\pm 100\mu\text{T}$ ranges only)	$\leq 10\text{pTrms}/\sqrt{\text{Hz}}$ at 1Hz $< 6\text{pTrms}/\sqrt{\text{Hz}}$ at 1Hz				
Perming (Magnetisation Hysteresis)	$< 2\text{nT}$ (at 1 x Full-scale, when powered)				
Orthogonality error	$< 0.5^\circ$ (< 0.1 for Mag-03MSES and Mag-03MS-NC only)				
Alignment error (Z axis to reference face)	$< 0.1^\circ$ (Mag-03MSES and Mag-03MS-NC only)				
Single sensor axis to body	$< 3.5^\circ$ (Mag-03IE sensors only)				
Excitation breakthrough	$< 20\text{mV}$ pk-pk at 15.625kHz typical				
Start-up/settling time	15ms				
Warm-up drift	15 minutes to meet specifications for Scaling/Offset < 60 minutes to meet specifications for noise				

Scaling Dependent Parameters					
Measuring range (μT)	± 70	± 100	± 250	± 500	± 1000
Scaling ($\text{mV}/\mu\text{T}$)	143	100	40	20	10
Scaling temperature coefficient (ppm)	$< \pm 80$	$< \pm 90$	$< \pm 100$	$< \pm 140$	$< \pm 200$
Offset in zero field (nT)	$< \pm 30$	$< \pm 30$	$< \pm 30$	$< \pm 40$	$< \pm 50$
Offset temperature coefficient ($\text{nT}/^\circ\text{C}$)	$< \pm 0.6$	$< \pm 0.6$	$< \pm 1$	$< \pm 1$	$< \pm 1$

Mag-03[®] Three-Axis Magnetic Field Sensors

Environmental and Mechanical	Mag-03MC	Mag-03MCFL
Operating temperature range:	-20°C to +70°C	-20°C to +70°C
Environmental protection	IP51	IP51
Dimensions (ø x L)	25 x 202mm	25 x 193mm
Weight	85g	80g
Enclosure material	Reinforced epoxy	Reinforced epoxy
Connector	Hirose RM15TRD10P	Flying leads (7x0.22mm ²) 500mm length (Up to 5000mm length to order)
Mating connector	Hirose RM15TPD10S	
Mounting	Mag-MC-BR or Mag-TA	Mag-MC-BR or Mag-TA

Environmental and Mechanical	Mag-03MCTP	Mag-03MCT
Operating temperature range:	-20°C to +70°C	-20°C to +70°C
Environmental protection	IP51	IP51
Dimensions (mm)	Electronics: ø25 x 115 length Sensor: ø21 x 56 length Sensor-electronics cable: 1000 length (up to 5000 length to order)	25.4 x 202mm
Weight	80g	95g
Enclosure material	Sensor: reinforced epoxy Electronics: aluminium alloy	Titanium
Connector	Hirose RM15TRD10P	Hirose RM15TRD10P
Mating connector	Hirose RM15TPD10S	Hirose RM15TPD10S
Mounting	Mag-MC-BR or Mag-TA	Mag-MC-BR or Mag-TA

Environmental and Mechanical	Mag-03IE	Mag-03IEHV
Operating temperature range:	-20°C to +70°C	-20°C to +70°C
Environmental protection	IP51	N/A
Dimensions (mm)	Electronics: ø25 x 115 length Sensor: ø8 x 30 length Sensor-electronics cable: 750 length (up to 5000 length to order)	Electronics: ø25 x 115 length Sensor: ø6.5 x 30 length Inner cable: 1100 length (up to 5000 length to order) Outer cable: 140 length Inner and outer cable joined by re-solderable terminal block
Weight	80g	80g
Enclosure material	Sensors: alumina cylinder Electronics: aluminium alloy	Sensors: glass tube with epoxy filling Electronics: aluminium alloy
Connector	Hirose RM15TRD10P	Hirose RM15TRD10P
Mating connector	Hirose RM15TPD10S	Hirose RM15TPD10S
Mounting	Mounting bracket or tripod adaptor available	Mounting bracket or tripod adaptor available

Environmental and Mechanical	MCES	MSES
Operating temperature range:	-20°C to +70°C	-20°C to +70°C
Environmental protection	IP64	IP64
Dimensions (mm)	25 x 207mm	32 x 32 x 166
Weight	100g	160g
Enclosure material	Reinforced epoxy	Reinforced epoxy
Connector	Amphenol 62GB-51T10-7P	Amphenol 62GB-12E10-7P
Mating connector	Amphenol 62GB-16J10-7S	Amphenol 62GB-16J10-7S
Mounting	Mag-MC-BR or Mag-TA	Mag-TA

Environmental and Mechanical	Mag-03MCUP	Mag-03MCUP-NS1
Operating temperature range:	-20°C to +70°C	-20°C to +70°C
Environmental protection	N/A	N/A
Dimensions (mm)	Electronics: 73 x 19.3 x 12 (W x D x H) Sensor: ø20.9 x 56 length Sensor-electronics cable: 610 length (up to 5000 length to order)	Electronics: 73 x 19.3 x 12 (W x D x H) Sensor: ø20.9 x 56 length Sensor-electronics cable: 67mm
Weight	80g	80g
Enclosure material	Sensor: reinforced epoxy Electronics: conformal coating	Sensor: reinforced epoxy Electronics: conformal coating
Connector	Flying leads 500mm length (up to 5000mm length to order)	Solder pads
Mating connector		
Mounting	N/A	N/A

Environmental and Mechanical	Mag-03MS-NC	Mag-03MSSFL
Operating temperature range:	-20°C to +70°C	-20°C to +70°C
Environmental protection	IP21	IP68 (submersible to 2000m)
Dimensions (mm)	32 x 32 x 152 (W x H x D)	30 x 30 x 195
Weight	175g	185g
Enclosure material	Reinforced epoxy	Polyacetal
Connector	Flying leads (7x0.22mm ²) 100mm length	Flying leads 500mm length (up to 5000mm length to order)
Mating connector	N/A	
Mounting	2 x M5 fixing holes. Mag-TA	3 x M3 clearance holes

Environmental and Mechanical	Mag-03IEv1
Operating temperature range:	-20°C to +70°C
Environmental protection	IP51
Dimensions (mm)	Electronics: ø25 x 115 length Sensor: ø8 x 30 length Sensor-electronics cable: 750 length (up to 5000 length to order)
Weight	80g
Enclosure material	Sensors: alumina cylinder Electronics: aluminium alloy
Connector	9-Way D-Type on 5m cable
Mating connector	9-Way D-Type
Mounting	Mag-MC-BR or Mag-TA

Electrical	
Supply voltage	±12V to ±17V
Current consumption - Positive	28 to 34mA in zero field
Current consumption - Negative	6 to 10mA in zero field
Feedback current	1.4mA/100μT
Power supply rejection ratio	120dB
Power-on surge	+250mA, -15mA,
Analogue output	±10V (±12V supply) (unbalanced, single ended ref. 0V)
Output impedance	10 Ω
Maximum Cable Length	600m (but supply must be adequate to achieve ±12V at sensor)

Mating Connectors

Mating connectors for all Mag-03 sensors are provided free of charge.

Cables

The standard cable length is 5m; other lengths up to 600m can be supplied on request. All cables are terminated with a Hirose RM15TPD10S, suitable for connection to Bartington Instruments' range of data acquisition and power supply units.

Mag-03IE, Mag-03MC, Mag-03MCT, Mag-03MCTP	
Conductors	7/0.2 PVC insulated conductors, overall braided screen and PVC sheath
Type no.	7-2-8C Black to Def Stan 61-12, part 4
Conductor resistance	0.092Ω/m
Capacitance	100pF/m core to core 170pF/m core to screen

Compatibility

The Mag-03 range is compatible with the following data acquisition and power supply units from Bartington Instruments:

- PSU1 Power Supply Unit
- DecaPSU Power Supply Unit (adaptor cable required)
- Magmeter-2 Power Supply and Display Unit
- Spectramag-6 Data Acquisition Unit
- SCU1 Signal Conditioning Unit
- DAS1 Data Acquisition System
- Decaport Analogue Interface Module

Mounting Accessories

A range of non-magnetic mounting accessories is available.

Specification	
Mag-BR	Mounting bracket for cylindrical sensors (supplied with mounting screws)
Mag-T	Tripod
Mag-TA	Universal tripod adaptor
Mag-LP	Levelling platform; can be mounted on the Mag-T tripod or Mag-MR rack; compatible with Mag-TA
Mag-MR	Mounting rack for the installation of Mag-LP platforms; available in lengths of 1 metre and multiples

Sensor	Appropriate support	Notes
Mag-03MC Mag-03MCFL	Mag-BR mounting bracket. Mag-TA tripod adaptor	Bracket clamps around the cylindrical enclosure.
Mag-03IE	Mag-BR mounting bracket. Mag-TA tripod adaptor	Bracket clamps around the body of the sensor, not the sensor heads.
Models not listed	Customer must provide mounting support	



The specifications of the products described in this brochure are subject to change without prior notice.

Bartington Instruments Ltd
5, 8, 10, 11, 12 & 16 Thorney Leys Business Park
Witney, Oxford OX28 4GE. England

Telephone: +44 (0)1993 706565
Email: sales@bartington.com

 **Bartington**[®]
Instruments